

Bangle Buddie- Attaching Thin Panel to unit to Bag Front - Steps 18-20




18) Align ZIPPER side of Thin Panel unit EST with Bag exterior by FIRST matching triple notches along Base, then aligning all other edges & notches. (Please notice that we used LOTS of pins in this process.) Here's another view (below).



Using a zipper foot (in this step & thru step 21), stitch a full 1/4" from edges with LS of Bag Front facing DOWN on machine bed.

(You may have to stop stitching & move zipper heads out of your way during this procedure.)

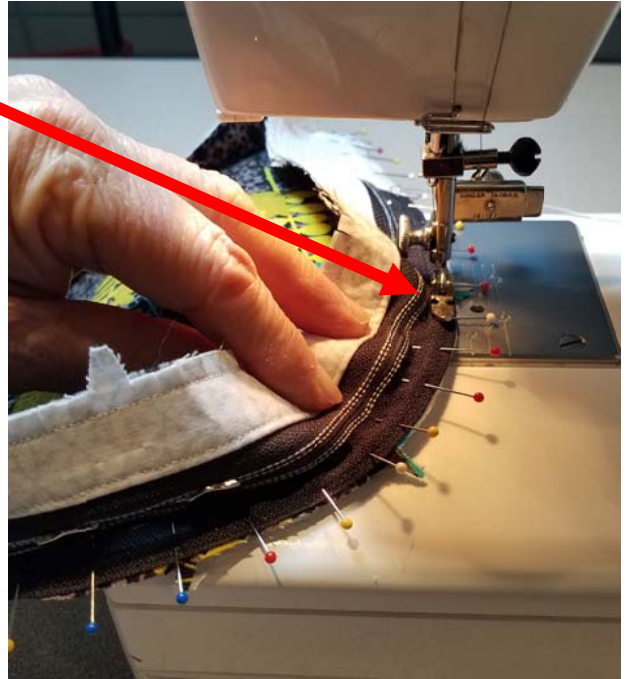

19) Begin pinning bias tape in place RST along the long Base edges on LS of Bag Front aligning raw edges. Continue pinning around entire circumference of Bag Front then overlap bias tape tail ~3/4" onto the diagonally folded end.



Flip entire unit LS DOWN on machine bed then stitch a scant 1/4" from edges.

20) Now all that's left is to flip the bias tape over raw seam edges of Bag Front & pin them in place on Panel (in lining) side of seam.

Stitch close to pressed edges (once again with Bag Front LS DOWN on machine bed).