


Sling Along- Stitching in the 1st Zipper Pouch in lining- Step 18-19

The following pictures are here to illustrate steps 18-19. They are presented in order after pressing a 1/4" hem (WST) in the bottom edge of one Zip Pouch.



In pictures 1+2 you can see that I've pinned a Zip Pouch to the WS of the zipper and also LST with the Wall along the seam.

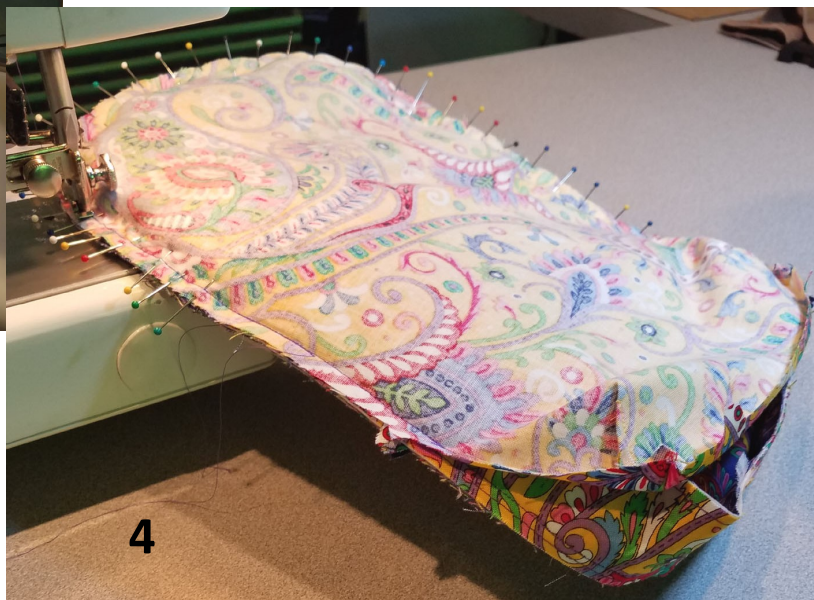

Pictures 3 + 4 both show the Zip Pouch being stitched in place.



Sling Along- Sewing in the 1st Zipper Pouch in lining- Step 18-19 (page 2)

In order to get the pressed-under edge to cover the raw edges of the Wall, I start by simply matching the double notches (#4), and then I pin the pressed edge in place there.



Please notice that I really make no effort to cover the actual Wall SEAM.... Only the raw edges of the Wall

Then I proceed to pin the rest of the pressed edge in place to completely cover the raw edges.

Again,,, please notice that the seam isn't cover because it really doesn't matter and it's a whole lot easier to not worry about doing that.



Sling Along-

Sewing in the 1st Zipper Pouch in lining- Step 18-19 (page 3)



9

In pictures 9 + 10 I'm hand-stitching the Zip Pouch lining in place.

Please notice that I am choosing to grab fabric with my pin from within the Wall SEAM itself. This is not only easy, but it also keeps the stitching completely invisible from the outside of the Wall and Pouch. I also make No effort to hide this stitching. You can see why below.



10

11



12

In picture 11 (above), the Pouch is completely stitched in place. As you can see... its not completely even and its really not very nice looking...

But in picture 12 (at left), once the Wall is pushed ESO the way its supposed to be in the finished Bag, you can no longer SEE this hand-stitched seam at ALL!

:)