


Folding & Pressing CC Slots



1) Fold CC Slots(#3) WST along "B" fold line while aligning "B" notches. Press fold line flat.



2) Keeping your "B" notches aligned & WST, flip this pressed section UP & onto RS of unit until "B" notches align with "A" single notches. Press flat & pin to secure area.

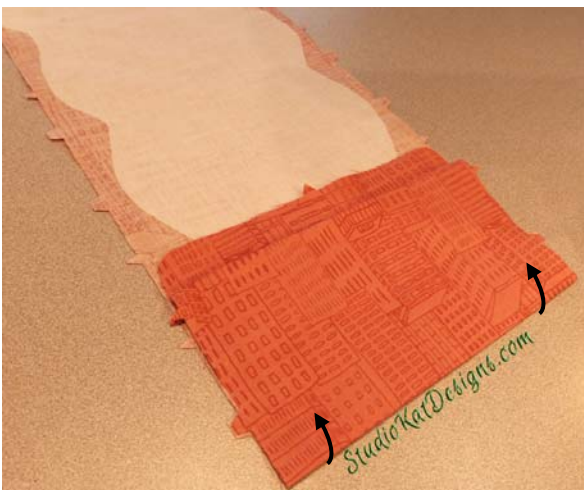

3) Flip CC Slots RSD on flat surface & pull top area UP onto WS of unit until "C" notches align. Press flat.



4) Pull "C" fold line UP onto RS of unit until it rests exactly 3/8" below the "B" fold line (unit will be WSD on flat surface). Press flat, pin to secure.



5) Repeat steps 3 & 4 to create your "D" fold line (and in turn your "E" fold line), pressing the "D" fold line UP onto RS of unit until it rests exactly 3/8" below the "C" fold line, & then the "E" fold line exactly 3/8" below your "D" fold line. When done correctly, your CC Slot unit will look like Fig. 5 (below)



6) Carefully place folded CC Slots WSD on Foundation(#1). Pin in place maintaining all four fold lines, then baste ~1/8" from edges around perimeter **AND across center of Wallet** between side single notches. Next, stitch a dividing line thru the slotted section starting at centerline stitching & proceeding to single notch at top of the slotted section.