


Uptown Saddlebag

Snap Pouch exterior– steps 1-7



Step 1– Place 1 snap piece “magnetic-side” **DOWN** on WS of Segment #1. Center mark of snap must be 2 1/8” below single notch and 1 5/16” from each fabric side edge. Pin in place thru plastic edging, then machine stitch in place close to plastic edges.

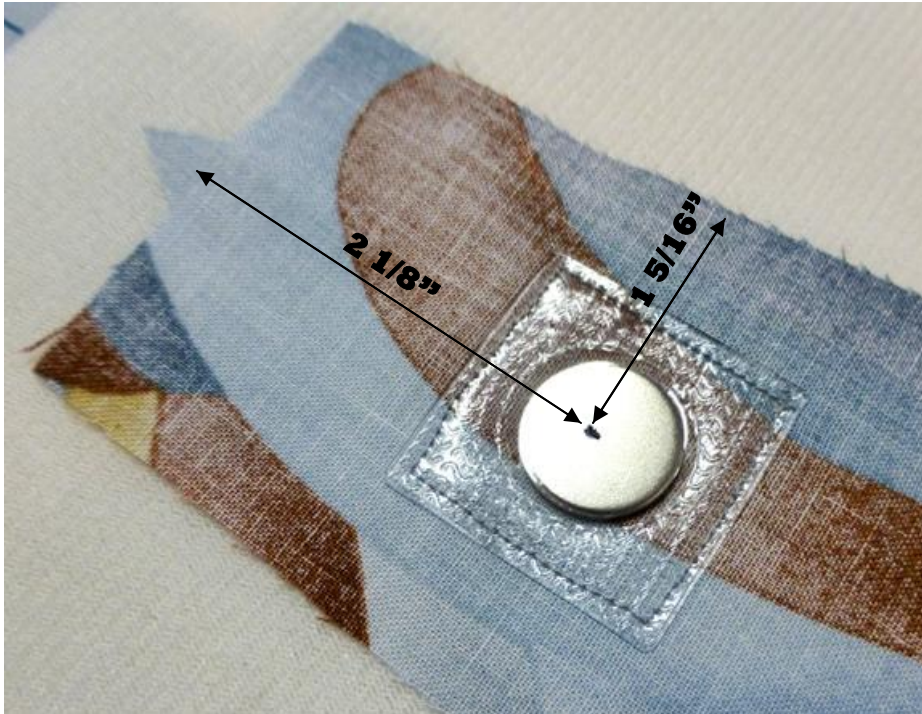

Steps 2-3– Center Segment 1 WSD on 13” X 12” piece of S&S. Align raw edges of a 12” Flange to each long single notched side edge, pinning it in place thru S&S. Stitch a scant 1/4” from both sets of raw edges thru ALL layers. Re-stitch around sew-in snap again, on top of your step #1 stitching.

Snap Pouch exterior– steps 1-7



Step 3— Here's how your Snap Pouch should look after you stitch your two Segment 2's in place and press them away from the Flanges & Segment 1.



Step 5-6— Here's how your Snap Pouch should look after you've added Flanges to the free edges of your Segment 2's, stitched your Segment 3's in place and pressed them away from Flanges.



Step 7— Now all that's left to do, is to stitch your Segment 3 edges in place on S&S and then carefully cut S&S even with your fabric edges.

DO NOT CUT AWAY ANY OF YOUR NOTCHES!