



the Katalina

StudioKat Designs, Inc.

Phone: 866/409-8634

Email: info@studiokatdesigns.com


Steps 23+26a-27– Installing Twist Lock on Flap




Step 23– Transfer Twist Placement dot from Flap template to BOTH Flap lining exterior AND to fleeced side of Flap lining. Apply fabric glue to an area 1" in all directions around the dot.

Replace Flap in exterior & ling back WST & allow glue to dry.


Aleene's Quick Dry Fabric Fusion works well for me, (I got it on Amazon), but there LOTS of others on the market that I'm sure work well!

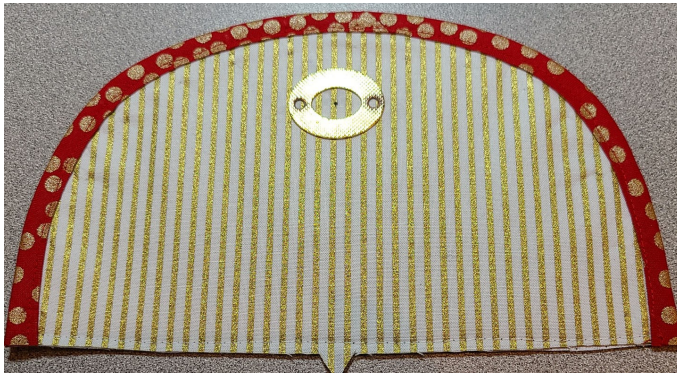

Step 26a– Center female side of Twist Lock over the dot.

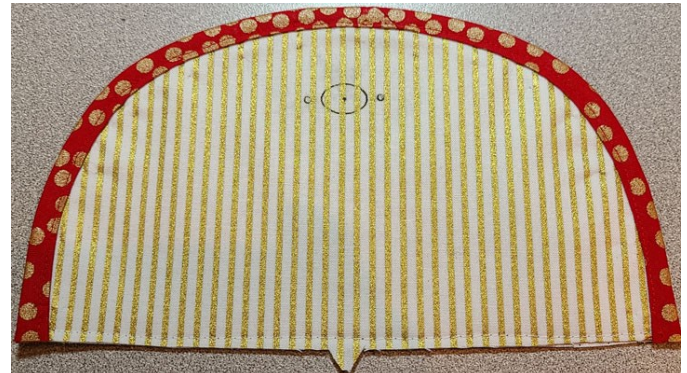

Step 26b– Trace with opening & ALSO within the screw hole openings directly onto lining fabric w/a pen.

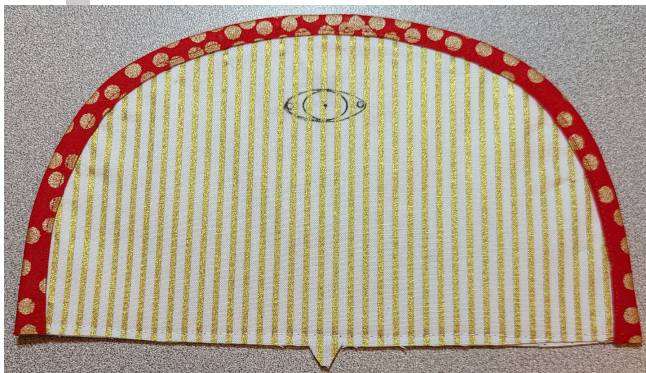

Step 26c– Expand oval/ circular area out & slightly beyond markings for twist lock & screw hole openings.




Step 26d– After glue is dry carefully cut into outlined area then slowly trim just to the OUTSIDE of the line you just created in step 26c.





More cutting pictures.



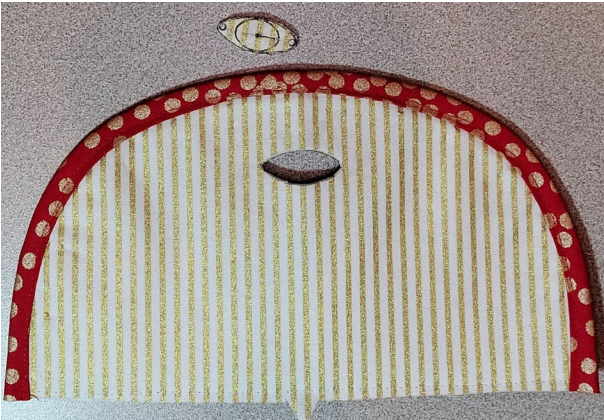

Step 26e- And here's the opening all cut out & ready for the twist lock! BUT WAIT! Line up your twist lock underneath the opening to see if there are any obstructions to the screw holes or any fabric hanging out into the twist lock opening.

By the looks of mine (at right) I might be OK, but if I have any trouble screwing my screws in I'll just need to clear out just a tiny area around the right-hand screw opening. But—Always be REALLY careful doing this!

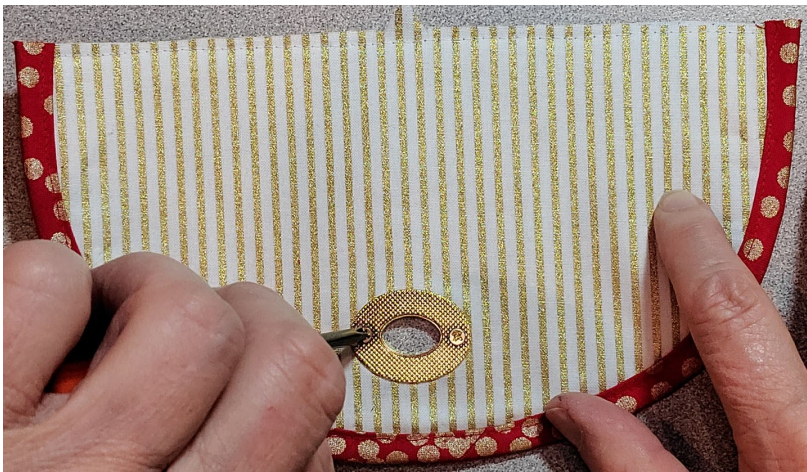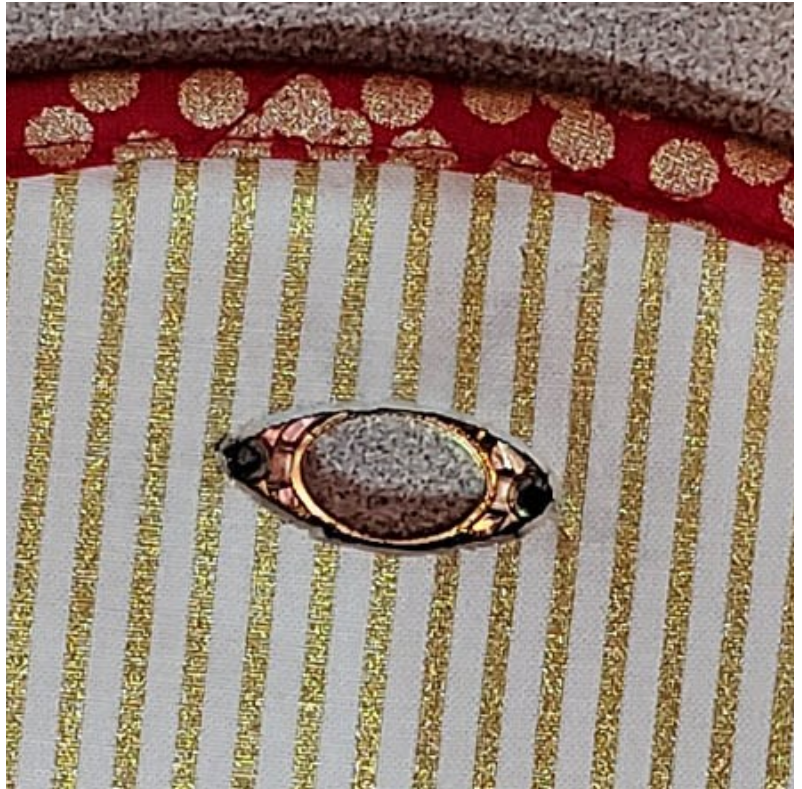

Step 26e– now all you have to do is to screw the twist lock back in place! (see above)

Step 27– (At right) Now we can drop the Flap in place aligning the bottom edges with the bottom edges of the Bag Top, then flipping the Bag Front top edges over the bottom raw edges of the Flap & stitching it in place across the Bag Front, from side edge to side edge.

:)

