



StudioKat Designs, Inc.

Phone: 336/416-1799

Email: info@studiokatdesigns.com

the AeroSling


Steps B1-B4: Shortening Zippers

(These instructions can also be helpful for steps B5-B8. The measurements are of course different, but the technique is exactly the same.)

Step B1: Place a Zip Tab in exterior RST on BOTH zipper ends so the distance between the outside Zip Tab raw edges is exactly 13-1/2" Stitch in place a scant 1/4" from edges.



Step B4: After similarly stitching a Zip Tab in lining in place RST w/WRONG side of zipper, press all Zip Tabs away from zipper. The adjusted length of this zipper should now be 13"

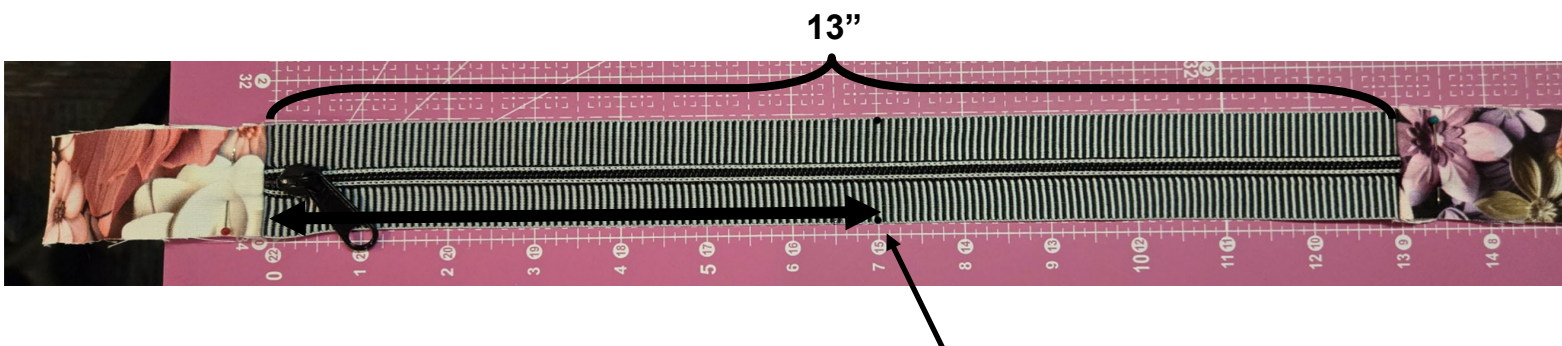

Step B4 (cont.)- Finally- make a mark on both zipper tape edges exactly 7" below top Zip Tab seam.